

SAS Cable Specification

Constituent
INTERNAL SAS 4LANE TO SAS 4LANE CABLE ASS'Y

Mechanical

Mating Force(32PIN CONN.): 45N Max
Removal Force(32PIN CONN.): 25N Test Load

Electrical

Insulation Resistance: 10M Ω Min
Contact Resistance: 3.0M Ω Max
HI-POT TEST : 300V DC FOR 10ms


Physical

Cable: SAS 30AWG PARELLE PAIR

Internal SAS Series :
SAS Cable Assembly



DRAWING

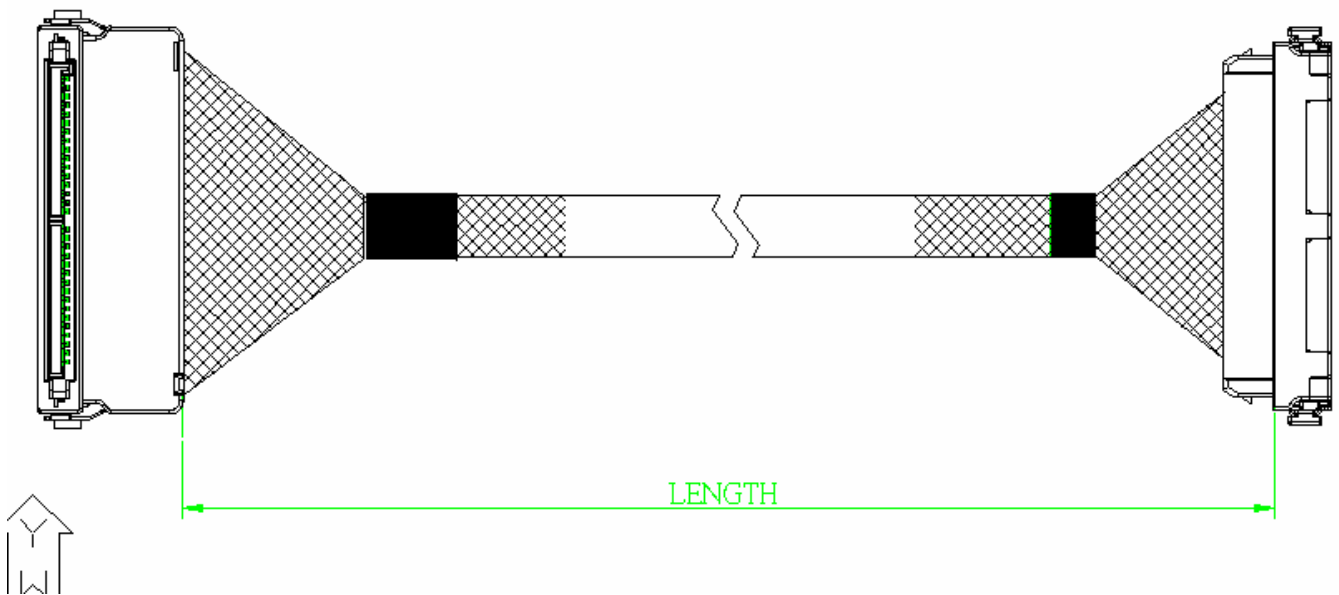

ORDERING INFORMATION

PRODUCT NO: FP XX XXX - XX - 0F

SAS CABLE ASS'Y

NO. OF CONDUCTORS 32-32 CONDUCTORS

EXTENSION CODE

SERIAL NO.

LEAD FREE