

**SPECIFICATIONS**

**Mechanical**

**Contact Captivation Force:** 3N min.  
**Durability:** 500Cycles min.

**Electrical**


**Impedance:** 50Ω (Nominal)  
**Frequency Range:** 0~6GHz  
**Voltage Rating:** 250V max.  
**Dielectric Withstanding Voltage:** 300V min.  
**Insulation Resistance:** 500MΩ min.

**Physical**


**Outer Contact(Output Terminal):** Copper Alloy  
**Center Contact(Input Terminal):** Stainless Steel  
**Plating:** See "ORDERING INFORMATION"  
**Operating Temperature:** -45°C to +85°C

**RF Coaxial Connector**

**Microwave RF Series  
 Jack Switch  
 For PCB SMT**

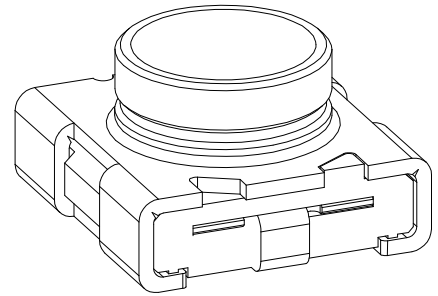

**DRAWING**

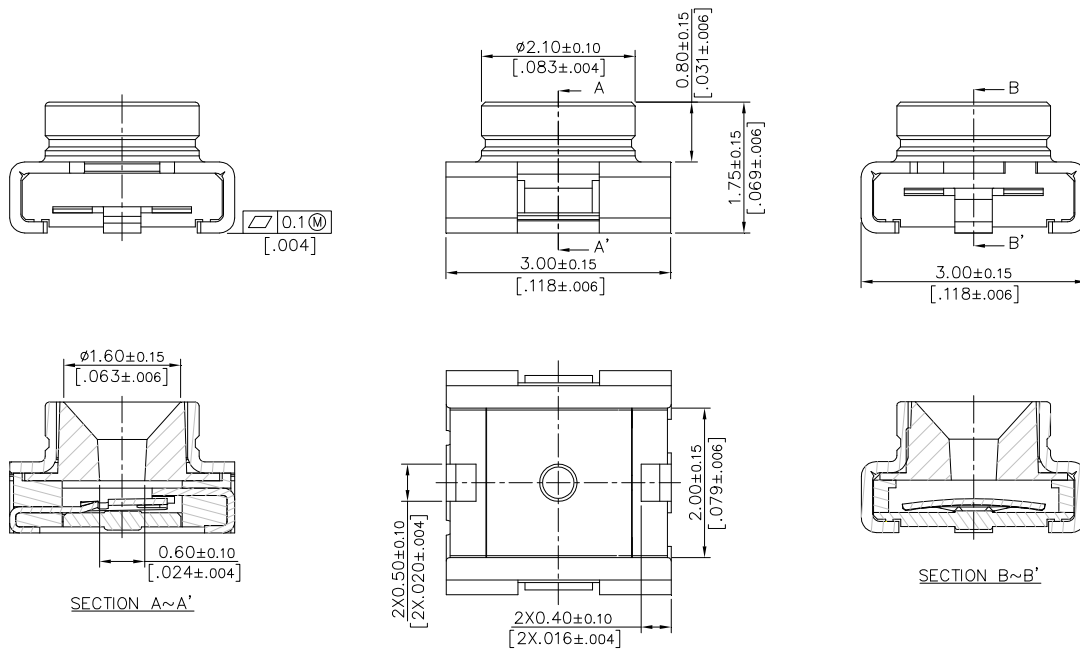

**ORDERING INFORMATION**

**PRODUCT NO.:** KFM3201 - 1012 - 7F

