

5A Avg.

120 Volts


SBD

NA05HSA12

最大定格 Maximum Ratings

Item	Symbol	Conditions	Unit
くり返しピーク逆電圧 Repetitive Peak Reverse Voltage	$V_{RRM}$	120	V
平均整流電流 Average Rectified Forward Current	$I_O$	$T_a=30^{\circ}C^*$ $V_{RM}=60V$	1.2
		$T_l=91^{\circ}C$ $V_{RM}=60V$ ( $T_l$ :lead Temperature)	5.0
実効順電流 R.M.S. Forward Current	$I_F(RMS)$	7.85	A
サージ順電流 Surge Forward Current	$I_{FSM}$	100 50Hz正弦半波, 1サイクル, 非くり返し 50Hz Half Sine Wave, 1cycle, Non-repetitive	A
動作接合温度範囲 Operating Junction Temperature Range	$T_{jw}$	-40~+150	$^{\circ}C$
保存温度範囲 Storage Temperature Range	$T_{stg}$	-40~+150	$^{\circ}C$

OUTLINE DRAWING(mm)

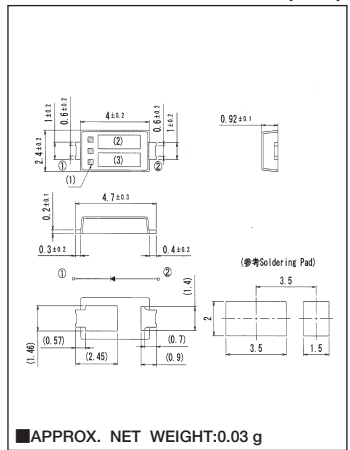

電氣的・熱的特性 Electrical/Thermal Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
ピーク逆電流 Peak Reverse Current	$I_{RM}$	$T_j=25^{\circ}C, V_{RM}=120V$	—	—	100	$\mu A$
ピーク順電圧 Peak Forward Voltage	$V_{FM}$	$T_j=25^{\circ}C, I_{FM}=5A$	—	—	0.86	V
熱抵抗 Thermal Resistance	$R_{th(j-a)}$	接合部・周囲間 Junction to Ambient	—	—	130	$^{\circ}C/W$
	$R_{th(j-l)}$	接合部・リード間 Junction to Lead	—	—	13	$^{\circ}C/W$

\*プリント基板実装/Glass-Epoxy Substrate mounted (Soldering Lands= 2.0 × 1.5 mm, 2.0 × 3.5 mm)

定格・特性曲線

